



STARTEC 400


www.andamios-tendo.com



CE12158

STARTEC 400

www.andamios-tendo.com

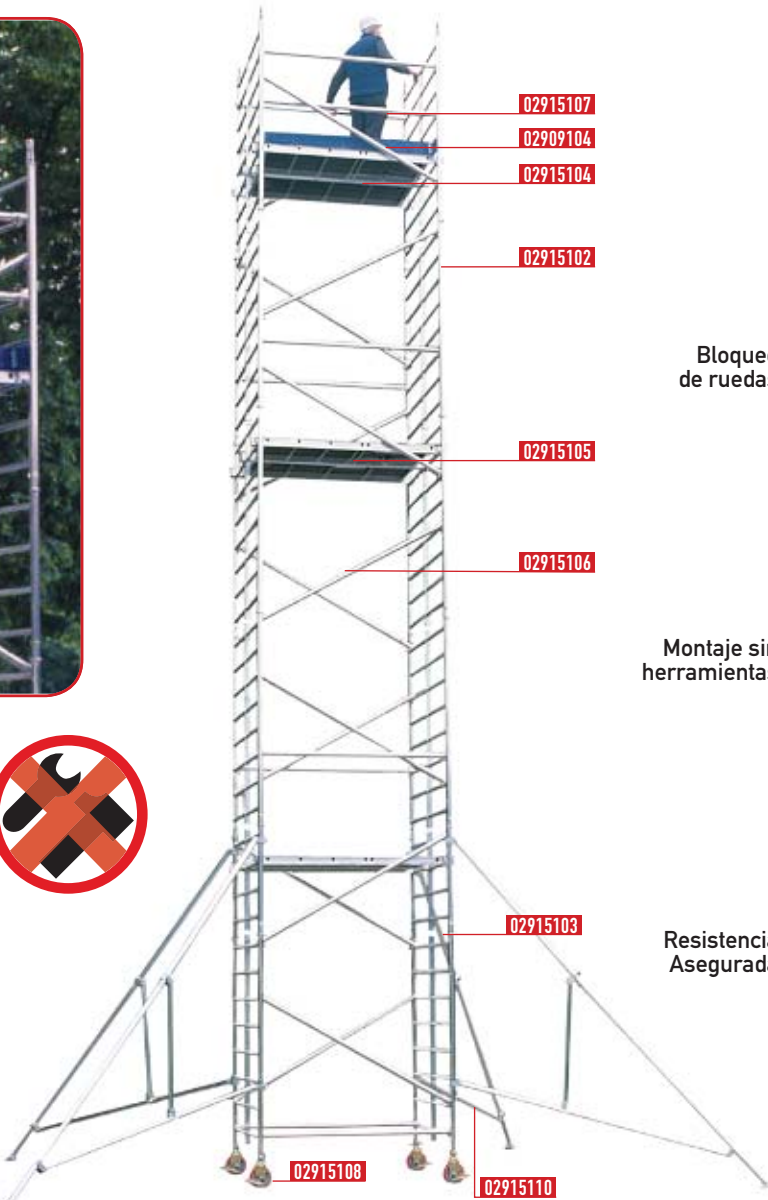

EN 1004 CLASS 3

Aluminium

200 kg/m² MAXI



Bloqueo de ruedas




Montaje sin herramientas



Resistencia Asegurada



Encastre rápido y seguro



Working height
Altura de trabajo
Hauteur de travail
4,00 m
> 14,00 m
MAXI


STARTEC 400

(model 600 : please call us)
(modelo 600 : consultarnos)
(modèle 600 : nous consulter)

Tower Sold in spare parts
Andamio vendido por componentes
Tour vendue en pièces détachées

REF.	4m 02915002	6m 02915004	8m 02915006	10m 02915008	12m 02915010	14m 02915012
02900013	1	2	3	4	5	6
02909104	1	1	1	1	1	1
02915102	2	4	6	8	10	12
02915103	2	2	2	2	2	2
02915104	1	1	2	2	3	3
02915105	1	1	2	2	3	3
02915106	2	4	8	10	12	14
02915107	6	6	8	8	10	10
02915108	4	4	4	4	4	4
02915110	4	4	4	4	4	4
02915111	0	0	0	4	4	4

REF.	A	B	C	D	E	F	⚠
02915002	2,00	2,10	1,50	4,53	4,23	3,44	131
02915004	4,00	2,10	1,50	4,53	4,23	5,44	137,5
02915006	6,00	2,10	1,50	4,53	4,23	7,44	206
02915008	8,00	2,10	1,50	6,12	5,82	9,44	243
02915010	10,00	2,10	1,50	6,12	5,82	11,44	295
02915012	12,00	2,10	1,50	6,12	5,82	13,44	318

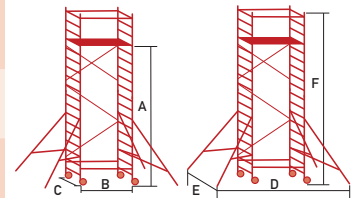

Working height = platform height (A) + 2 m
Altura de trabajo = altura de plataforma (A) + 2 m
Hauteur de travail = hauteur de plate-forme (A) + 2 m